



MultiSync® PN-P Series Large Format Displays

PN-P436 / PN-P506 / PN-P556 / PN-P656

ARRIVALS					ARRIVALS					DEPARTURES					DEPARTURES					DEPARTURES														
Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate	Flight	From	Status	Sched	Gate					
4866	Chicago, IL	Arrived	10:37 AM	F80	2847	Chicago, IL	In Air	11:23 AM	A8	2340	Philadelphia, PA	Delayed	12:18 PM	E70	326	Washington, DC	In Air	1:40 PM	A9	809	Philadelphia, PA													
6840	Chicago, IL	Arrived	10:37 AM	F80	2919	Chicago, IL	In Air	11:23 AM	A8	1337	Denver, CO	In Air	12:29 PM	A7	2835	Washington, DC	In Air	1:40 PM	A9	4429	Philadelphia, PA													
2042	New York, NY	Arrived	10:38 AM	Term M - E65	3460	Chicago, IL	In Air	11:23 AM	A8	5167	Denver, CO	In Air	12:29 PM	A7	7924	Washington, DC	In Air	1:40 PM	A9	5710	Philadelphia, PA													
2706	Boston, MA	Arrived	10:38 AM	Term M - E67	3362	Nashville, TN	In Air	11:25 AM	C43		Washington, DC	In Air	1:23 PM	F79	7999	Washington, DC	In Air	1:40 PM	A9	7277	Philadelphia, PA													
4459	New York, NY	Arrived	10:38 AM	Term M - E65	683	Washington, DC	Landed	11:29 AM	A9		Washington, DC	In Air	1:23 PM	F79	8856	Washington, DC	In Air	1:40 PM	A9	8617	Philadelphia, PA													
4765	New York, NY	Arrived	10:38 AM	Term M - E65	2031	Washington, DC	Landed	11:29 AM	A9		Washington, DC	In Air	1:30 PM	C33	2360	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	3125	New York, NY													
6469	New York, NY	Arrived	10:38 AM	Term M - E65	2832	Washington, DC	Landed	11:29 AM	A9		Washington, DC	In Air	1:35 PM	Term M - E66	2516	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	205	Grand Cayman													
458	Baltimore, MD	Arrived	10:40 AM	C37	436	Charlotte, NC	In Air	11:45 AM	A8		Washington, DC	In Air	1:35 PM	C37	5722	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	2195	New York, NY													
1186	Cleveland, OH	Arrived	10:40 AM	A6	2523	Philadelphia, PA	In Air	11:49 AM	A8		Washington, DC	In Air	1:35 PM	Term M - E66	6485	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	7539	New York, NY													
467	Washington, DC	Arrived	10:41 AM	F78	1336	Baltimore, MD	In Air	11:50 AM	C37		Washington, DC	In Air	1:35 PM	Term M - E66	6695	Dallas-Fort Worth, TX	Delayed	1:52 PM	F80	57	Fort Lauderdale, FL													
1189	Dallas-Fort Worth, TX	Arrived	10:44 AM	F84	76	Fort Lauderdale, FL	In Air	12:00 PM	A10		Washington, DC	In Air	1:35 PM	Term M - E66	114	Burlington, VT	Scheduled	1:57 PM	C45	422	Baltimore, MD													
6042	Dallas-Fort Worth, TX	Arrived	10:44 AM	F84	2076	Atlanta, GA	In Air	12:00 PM	C35		Washington, DC	In Air	1:35 PM	Term M - E66	1899	Baltimore, MD	Departed	2:00 PM	C30	1534	Hartford, CT													
2710	Charlotte, NC	Arrived	10:53 AM	F79	2895	Chicago, IL	In Air	12:00 PM	C39		Washington, DC	In Air	1:35 PM	Term M - E66	2705	Phoenix, AZ	Scheduled	2:00 PM	C38	1583	Chicago, IL													
430	St Louis, MO	Arrived	11:00 AM	C38	3076	Fort Lauderdale, FL	In Air	12:00 PM	A10		Washington, DC	In Air	1:35 PM	Term M - E66	572	Fort Lauderdale, FL	Departed	2:05 PM	C34	1625	Nashville, TN													
2301	Minneapolis, MN	Arrived	11:09 AM	Term M - E68	5476	Fort Lauderdale, FL	In Air	12:00 PM	A10		Washington, DC	Delayed	1:36 PM	Term A - A10	1100	Detroit, MI	Departed	2:09 PM	Term M - E65	2851	Chicago, IL													
532	Wilmington, DE	Arrived	11:12 AM		891	Boston, MA	In Air	12:09 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	1876	Detroit, MI	Departed	2:09 PM	Term M - E65	3057	Fort Lauderdale, FL													
1587	Atlanta, GA	Landed	11:12 AM	Term M - E66	2473	Boston, MA	In Air	12:09 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	2721	Detroit, MI	Departed	2:09 PM	Term M - E65	3301	Chicago, IL													
6136	Atlanta, GA	Landed	11:12 AM	Term M - E66	125	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	6541	Detroit, MI	Departed	2:09 PM	Term M - E65	3468	Chicago, IL													
6639	Atlanta, GA	Landed	11:12 AM	Term M - E66	2072	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	195	Bogota	Cancelled	2:15 PM		4407	Fort Lauderdale, FL													
1473	Philadelphia, PA	In Air	11:13 AM	E70	7857	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	5873	Bogota	Scheduled	2:15 PM		5057	Fort Lauderdale, FL													
1664	Toronto	Landed	11:20 AM	Term 1 - E73	8760	New York, NY	In Air	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	516	Philadelphia, PA	Scheduled	2:22 PM	A17	5457	Fort Lauderdale, FL													
2326	Chicago, IL	In Air	11:23 AM	A8	1099	Atlanta, GA	Departed	12:26 PM	Term A - A10		Washington, DC	In Air	1:36 PM	Term A - A10	3345	Milwaukee, WI	Delayed	2:40 PM	C31	6543	Chicago, IL													



Impactful Displays That Deliver

Say goodbye to dull, inconsistent displays

Professionally Crafted for High-Impact Messaging

The Sharp MultiSync® PN-P Series is your trusted choice for bold, ultra-reliable digital signage—built to perform in environments with higher ambient lighting and extended runtime needs such as healthcare, command centres, finance, retail, and corporate settings. Featuring factory-calibrated colour precision, flexible performance options, and a tough all-metal chassis, these displays deliver stunning visuals and commercial-grade durability straight out of the box.

Key Pain Points—Solved

Tired of inconsistent colours across displays? SpectraView™ Engine gives you pixel-perfect factory calibration and pro-level customization.

Looking for more accurate colour reproduction? These displays have wide colour gamut panels, allowing you access to a broader range compared to standard displays. This will give you more accurate colour reproduction for retail, corporate or education branding.

Dealing with outdated or clunky setups? Enjoy seamless modular upgrades with Intel® SDM and Raspberry Pi Compute Module 4 support.

Struggling with overheating or display dimming? Smart cooling tech keeps your visuals bright and your system protected.

Need 24/7 uptime in tough environments? Full metal build, active cooling, and secure LAN controls ensure long-term reliability.



High-End UHD Visuals, All Day, Every Day

Get next-level clarity with native 3840 x 2160 resolution and anti-glare, high-haze glass across the entire PN-P Series lineup. Imagery and messaging can become more vivid and lifelike than ever before! Additionally, these models boast an impressive 700 cd/m² in brightness, ensuring that your message cuts through—even in high-ambient light spaces.




Consistent Colour with SpectraView™ Engine

Pre-calibrated for luminance, white point, gamma, and uniformity, every PN-P display features SpectraView Engine Technology and is ready to go, right out of the box. Want deeper control? Through the SpectraView Engine, dial in white point with adjustments of 100k, select brightness based on luminance level, or even input your own CIE colour coordinates, giving users capabilities like never before. Bonus: backlight stabilization keeps your visuals looking fresh longer—no early fade-outs here. All of these features are specifically engineered to give you the best visual quality for an extended duration.

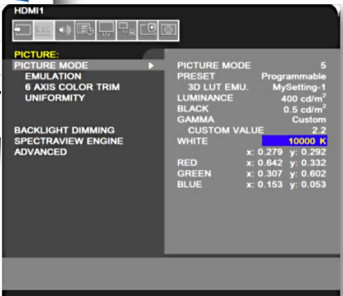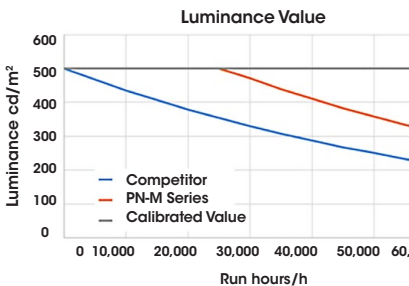

Smarter Daisy Chaining & Multi-Display Sync

Connect up to 4 independent displays from one source thanks to DisplayPort 1.4 connectivity and HBR3 capabilities with Multi-Stream Transport (MST*). MST capabilities can drive up to 4 independent displays from a single DisplayPort source by multiplexing several video streams into a single stream and sending it to the display that then acts as a branch device to demultiplex the signals into the original streams - ideal for menu boards, video walls, and synchronized signage. Additionally, the display can daisy chain the LAN connection, which allows for the pass-through of RS-232C, TCP/IP and IR communications. This gives the customer the ability to control full arrays of displays remotely or via the IR remote control, streamlining the ease of use for the customer.

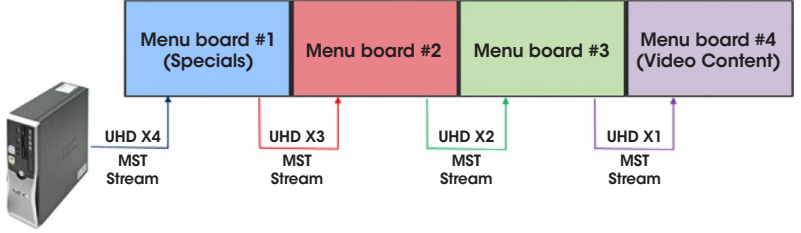

*MST capabilities depend on the video card driving the system.


Power, Connect, Control—Simplified

Each PN-P product features an integrated USB hub, with a USB-C input that supports both DP-Alt mode and upstream data transfer. It includes two downstream USB ports (one USB-A and one USB-C) for connecting and managing peripherals. This built-in hub reduces the need for additional equipment, lowering overall setup costs. Additionally, the USB-C input provides 65W of Power Delivery, enabling devices like laptops to charge directly from the display—ideal for huddle spaces and presentation environments.




Commercial Toughness You Can Trust

A full-metal chassis, carrying handles, and an active cooling system mean it's ready for harsh environments without compromising the sleek design. Integrated temperature sensors keep your brightness consistent without thermal dimming - your content stays front and centre, even in the harsher conditions found in commercial environments.

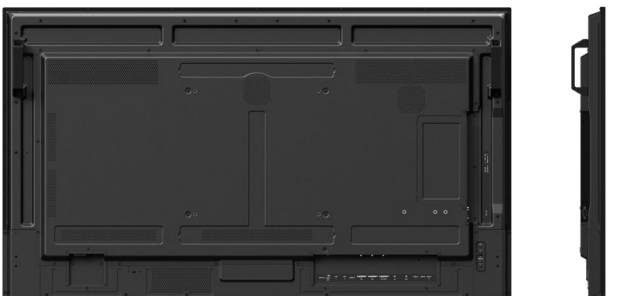


Built for Flexibility

The MultiSync PN-P Series is modular by design, ready to integrate Intel® Smart Display Modules (SDM-L/SDM-S) and Raspberry Pi Compute Module 4 for embedded intelligence without external gear or messy cabling. Through clever mechanical and electrical design, the PN-P Series allows for sleek all-in-one intelligence and interoperability in a small form factor setting, giving you everything you need for digital signage applications while also offering the ability to enhance your screen through multiple integrated professional technologies - all while simplifying installations and allowing for clean and easy set-up.

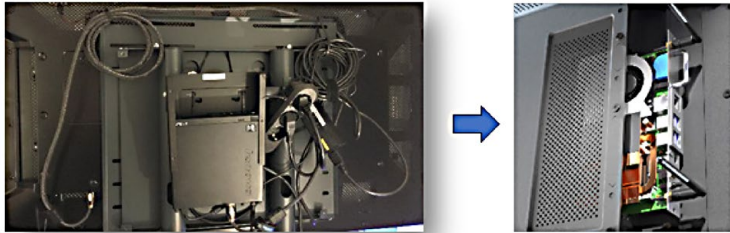

Built-in Security for IT Peace of Mind

With IEEE802.1x authentication via the LAN connection, SSL/TLS browser control, LAN and USB port disabling, and MAC/IP filtering, the MultiSync PN-P Series helps keep your network secure and locked down.

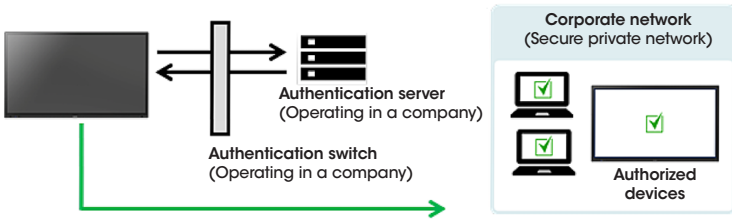

Total Control with NaViSet Administrator™

Remotely manage all your PN-P Series - and other Sharp or NEC displays - from a single, centralized dashboard using NaViSet Administrator 2™. Perfect for multi-display setups, this free tool lets you monitor status, automate tasks, generate reports, and make on-demand changes from anywhere. Want even more power? Upgrade to the Server Edition for enhanced features and full remote access across your ecosystem.




NaViSet
Administrator 2




Smart Input Prioritization

Auto-switch between up to three prioritized inputs or power on with a live signal - no more blank screens or manual resets. If a primary source goes down, the display will automatically switch to whatever the customer has prioritized next. The first detect First Detect option also allows for the display to automatically switch to any source that plugs into it, allowing the display to wake on any synced signal.


Typical Display

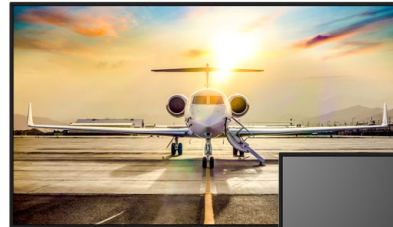

If the source fails, this results in a blank screen

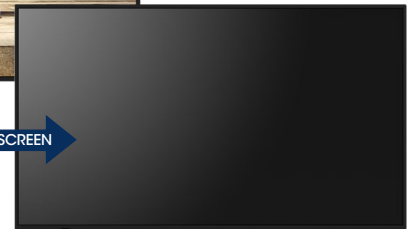


PN-P Series

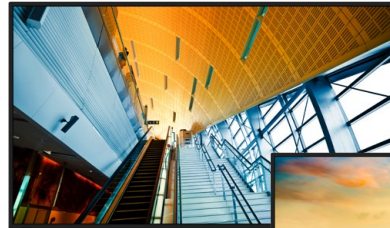


If the source fails, the display automatically switches to the next prioritized source, allowing for zero downtime on the display



First Detect

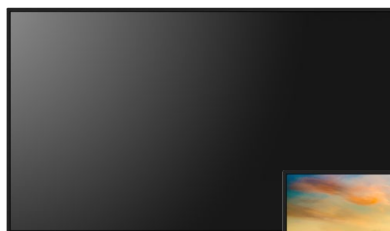

Setting the display to First Detect enables it to automatically power on when a source is connected.

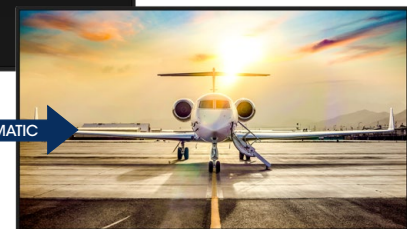


Bottom Line:

The Sharp MultiSync PN-P Series brings next-gen display power, all-day reliability, and built-in flexibility—wrapped in a clean, modern design that makes your content pop. Whether you're running a control room or creating an unforgettable retail experience, the PN-P Series is here to boost your signage game and keep it fresh 24/7.

Model		PN-P436	PN-P506	PN-P556	PN-P656
LCD Module	Panel Technology	IPS	VA	IPS	
	Viewable Image Size	42.5"	49.5"	54.6"	64.5"
	Native Resolution	3840 x 2160			
	Brightness (Typical)	700 cd/m ²			
	Contrast Ratio (Typical)	1200:1	4000:1	1200:1	
	Viewing Angle	178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR-10			
	Aspect Ratio	16:9			
	Colour Gamut	72% NTSC		92% DCI	
	Displayable Colours	Over 1.07 Billion (10bit dithered)			
	Orientation	Landscape and Portrait (CCW Rotation)			
Panel Haze (%)	25				
Connectivity	Input Terminals	Digital	HDMI 2.0 x2, DP 1.4 x1, USB-C (Upstream with DP-AI+ Mode and 65W Power Delivery)		
		Analog	N/A		
		Audio	N/A		
		External Control	LAN (100Mbit), 3.5mm Mini Jack IR Remote, RS-232C		
	Output Terminals	Data	USB-C (Upstream with DP-AI+ Mode and 65W Power Delivery), USB-A 2.0 (Service), USB-A, USB-A 3.2 (Downstream), USB-C (Downstream)		
		Digital	HDMI x1, DisplayPort x1 (Carries DP or DP-AI+ signals via USB-C)		
		Analog	N/A		
		Audio	3.5mm Mini Jack		
External Control	LAN (100Mbit, carries RS-232C and IR)				
Power Consumption	On (Typ/Max Brightness/All Max)	80W/145W/320W	95W/175W/345W	115W/180W/365W	160W/255W/435W
	Network Standby	0.5W			
	Normal Standby	2W			
	Current Rating	3.6A - 1.5A @ 100V - 240V	3.9A - 1.6A @ 100-240V	4.1A - 1.7A @ 100V - 240V	5.0A - 2.1A @ 100V - 240V
	Speaker Rating	Integrated 10W x 2, Optional through SP-RM3a		Optional through SP-RM3a	
Physical Specifications	Bezel Width (L/R,T/B)	9.9mm/9.9mm, 9.9mm/13.9mm	10.9mm/10.9mm, 10.9mm/13.9mm	11.0mm/11.0mm, 11.0mm/13.9mm	
	Net Dimensions (Without stand; W x H x D)	38.0 x 21.9 x 2.6 in. 965.0 x 557.2 x 66.5mm	44.2 x 25.4 x 2.6 in. 1121.6 x 645.2 x 66.5mm	48.7 x 27.9 x 2.3 in. 1235.6 x 709.3 x 59.5mm	57.3 x 32.8 x 2.3 in. 1454.5 x 832.4 x 59.5mm
	Net Weight	13.5kg/29.8lbs.	18.0kg/39.7lbs.	20.5kg/45.2lbs.	26.0kg/57.3lbs
	VESA Hole Configuration	4 x M6 (300 x 300)			4 x M6 (400 x 400)
Sensors	Ambient Light Sensor	Integrated			
	Human Sensor	Optional through PN-KTRC3			
	Temperature Sensor	Integrated and programmable; linked to cooling fans			
	NFC Sensor	N/A			
Environmental Conditions	Operating Temperature	0°C to 40°C			
	Operating Humidity	20-80%			
	Operating Altitude	3000m (9843ft)			
Limited Warranty	5 years Advanced Replacement				
Additional Features	AMX Support, CEC Support through HDMI, Crestron Connected V2 Support with XIO Cloud, IEEE802.1x Wired Network Authentication, SSH, NaViSet Secure, Signed FW upon Install, Admin Login, IP Address Filtering, MAC Address Filtering, SNMP V1 /2/3, USB/LAN Lockout Capability, PD Comms Tool Support, NEC Firmware Update Tool, Display Browser Control, Display Wall Calibrator Compatible, HDR Support (PQ, HLG, HDR10), Key Guide, NaViSet Administrator 2 Compatible, OSD Rotation for Portrait Orientation, SDM Compatible, USB Power Delivery via USB-C (65W), Raspberry Pi Compute Module Compatible, Real-Time Clock, Local Dimming, Multi Picture Mode, SpectraView Engine Technology, Quick Start, Internet Time Server, Auto ID/IP Settings, Energy Star 8.0				
Ships With	3m AC Power Cord, 2.0m HDMI Cable, IR Remote Control, Batteries, AAA batteries		3m AC Power Cord, 2.0m HDMI Cable, IR Remote Control, Batteries, AAA Batteries, Screw (M4 x10 with washer), Clamp, Optional Cover (SDM/CMIF)		
Optional Speakers	SP-RM3a				
Optional Stand	PN-ST43L, ST-43M		PN-ST55L, ST-65M		
Other Accessories	All SDM Option Cards, Raspberry Pi Compute Module 4 with optional NEC Interface Board, Human Sensor (PN-KTRC3)				

Dimensions

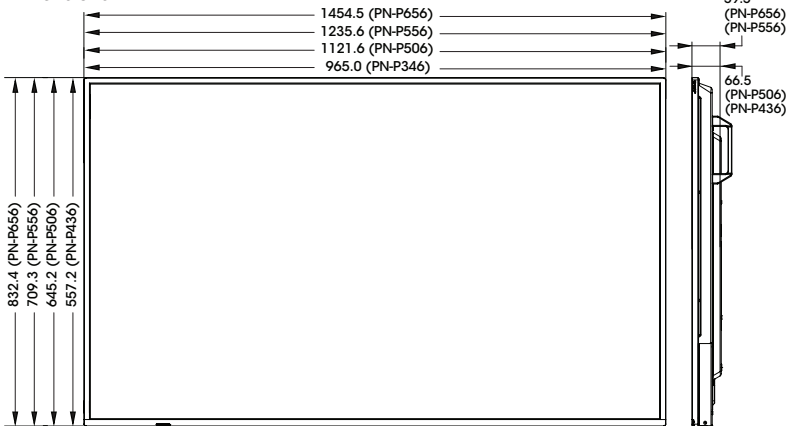

Tabletop Stand

- PN-ST43L / ST-43M (PN-P436, PN-P506)
- PN-ST55L / ST-65M (PN-P556, PN-P656)




Wall Mount WMK-3298T



Input Panels

1. USB-A (Service)
2. Audio Mini Jack Out
3. LAN1 (Control In)
4. LAN2 (Control Out)
5. IR Remote IN
6. HDMI IN2
7. HDMI Out
8. HDMI IN1 (ARC)
9. DisplayPort In
10. DisplayPort Out
11. USB-C1 (Upstream, DP-AI+ Mode, 65W PD)
12. USB-A (2.0/3.2 Gen1, Downstream)
13. USB-C2 (2.0/3.2 Gen1, Downstream)
14. RS-232C In

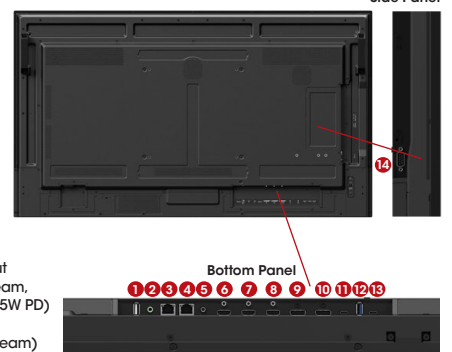

Visit www.sharp.ca for details.



SHARP ELECTRONICS OF CANADA LTD.
5995 Avebury Road, Suite 900
Mississauga, Ontario L5R 3P9
1-800-567-4277 • www.sharp.ca

Sharp, MultiSync, NaViSet and TileMatrix and all related trademarks are trade-marks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. Crestron, the Crestron logo, Crestron Connected, and XIO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without prior notice. Screen images are simulated.

Printed in Canada.
VSG-VS-PNP436/506/556/656-B-E-PDF-05/2026