

# SHARP®

## Sharp MultiSync® PN-M322 32" Professional Grade Large Format Display

PN-M322



The new MultiSync® PN-M322 provides a cost-conscious and professional-quality 32" display for digital signage purposes where brightness, visual quality and aesthetics matter most. A crystal clear, 450 cd/m<sup>2</sup> newly integrated anti-glare panel ensures that your content shines in a majority of applications.


The mechanical design allows for maximum display efficiency while ensuring that the product is built to last effectively for 24/7 applications. A full metal chassis, high-end componentry and an integrated scheduler function to allows for customer peace of mind for extended runtime applications in commercial situations.

The PN-M322 also contains full external control support through both RS-232C or LAN connectivity, effectively making the MultiSync PN-M322 ideal for commercial installations where monitoring is necessary - such as for retail advertising, smaller-sized transportation signage or promotional boards in restaurants and convenience stores.

### Benefits:

- **Anti-Reflective 24/7 panel** with commercial-grade brightness allows this display to easily fit into applications such as retail, transportation or convenience stores
- **Integrated USB Media Player** allows for easy content delivery and an integrated and automatic failover source if necessary
- **Engineered with a precision-machined metal chassis and high-grade components**, this display is built for uncompromising reliability—delivering stable, 24/7 performance in demanding environments
- **Full External Control** via RS-232C or LAN to allow for monitoring via third party control systems or free Sharp NaViSet Administrator software
- **Landscape and Portrait** capable to allow for different installation options dependent on the application and need.

Model		PN-M322	
LCD Module	Panel Technology	VA	
	Viewable Image Size	32"	
	Native Resolution	1920 x 1080	
	Brightness (Typical)	450 cd/m <sup>2</sup>	
	Contrast Ratio (Typical)	4000:1	
	Viewing Angle	178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10	
	Aspect Ratio	16:9	
	Colour Gamut	68% NTSC (TBD)	
	Displayable Colours	Over 16.7 Million (8bit)	
	Orientation	Landscape and Portrait (CCW Rotation)	
	Panel Haze (%)	25	
Connectivity	Input Terminals	Digital	HDMI 2.0 x2, DP 1.2 x1
		Analog	VGA x1
		Audio	N/A
		External Control	LAN (100Mbit), 3.5mm Mini Jack IR Remote, RS-232C
		Data	USB 2.0 (Media Player, 5V/2A)
	Output Terminals	Digital	N/A
		Analog	N/A
		Audio	3.5mm Mini Jack
External Control	N/A		
Power Consumption	On (Typ/Max Brightness/All Max)	40W/50W/75W	
	Network Standby	2W	
	Normal Standby	<0.5W	
	Current Rating	0.8A - 0.3A @ 100V - 240V	
	Speaker Rating	Integrated 5W x 5W	
Physical Specifications	Bezel Width (L/R,T/B)	11.9mm/11.9mm/11.8mm/17.2mm	
	Net Dimensions (Without stand: W x H x D)	28.6 x 16.8 x 2.6 in. 726.5 x 425.4 x 66.5mm	
	Net Weight (Without stand: kg/lbs.)	6.3kg / 13.9lbs.	
	VESA Hole Configuration	100mm x 100mm (4 x M4 x 14mm), 200 x 200 (4 x M4 x 10mm, off-centre)	
Sensors	Ambient Light Sensor	Optional (KT-RC3)	
	Human Sensor	Optional (KT-RC3)	
	Temperature Sensor	Integrated and programmable	
	NFC Sensor	N/A	
Environmental Conditions	Operating Temperature	0° to 40°C	
	Operating Humidity	20-80%	
	Operating Altitude	3000m (9843ft)	
Limited Warranty	3 years		
Additional Features	AMX Support, Automated Email Alert Function, CEC Support through HDMI, Crestron RoomView Support, Display Browser Control, Display Wall Calibrator Compatible, HDR Compatible (PG, HLG, HDR10), Key Guide, NaViSet Administrator 2 Compatible, OSD Rotation for Portrait Orientation, PJ Link Support, Power USB Port (5V/2A), Removeable Logo Ornament, Real Time Clock, TileMatrix, SNMP Consumer Electronics Control (CEC), Integrated USB Media Player, Integrated Temperature Sensor, Full Input Detect Functionality, Programmable Gamma, Scheduler Function, Off Timer, Vacation Switch, Variable or Fixed Audio Out, Key and Button Lock Settings, USB Copy		
Ships With	3m AC Power Cord, 2.0m HDMI Cable, IR Remote Control, AAA batteries		
Optional Speakers	N/A		
Optional Stand	ST-32M / PN-ST32L		
Other Accessories	Wall Mount (WMK-3298T), Human Sensor (KT-RC3)		

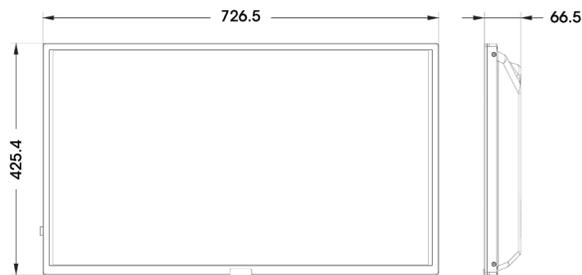

### Tabletop Stand

ST-32M / PN-ST32L



### Wall Mount

WMK-3298T



Bottom Panel



### Input Panels

1. Audio Mini Jack OUT
2. IR Remote IN
3. LAN (Control)
4. DisplayPort IN
5. HDMI1 IN (ARC)
6. HDMI2 IN
7. USB (Media Player / Power)
8. RS-232C IN
9. VGA IN (RGB)



Visit [www.sharp.ca](http://www.sharp.ca) for details.



SHARP ELECTRONICS OF CANADA LTD.  
5995 Avebury Road, Suite 900  
Mississauga, Ontario L5R 3P9  
1-800-567-4277 • [www.sharp.ca](http://www.sharp.ca)

The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License. Sharp, MultiSync, NaViSet and TileMatrix and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. Crestron, the Crestron logo, Crestron Connected, and XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without prior notice. Screen images simulated.

Printed in Canada.  
VSG-VS-PNM322-E-PDF-02/2026