



MultiSync® PN-E Series Large Format Displays

PN-E329/PN-E439/PN-E509/PN-E559/
PN-E659/PN-E759/PN-E869



Essential Performance. Ideal for Education, Corporate and Digital Signage Applications

The Essentials

With a brilliant 4K UHD* panel and simplified controls, the Sharp PN-E Series delivers everything you need for captivating digital signage, workplace collaboration and dynamic information sharing. The Sharp PN-E Series offers a wide range of sizes from 32" Class (31.5" diagonal) to 86" Class (85.6" diagonal). Regardless of your industry, when you need to inform, entertain or engage an audience, the PN-E Series delivers your message with superb picture quality.

*PN-E329 - 1080p panel only.

Sleek and Stylish Design

The PN-E Series fits more screen into less space with a sleek, streamlined design. Uniform bezels on all sides keep the look clean and the focus on your content - whether in portrait or landscape. A low-profile design fits sleekly into modern spaces, while the metal bezel brings durability and style.

USB-C Simplicity

Modern devices are all about USB-C - and the PN-E Series keeps up. In addition to HDMI input, it supports audio and video via a single USB-C connection. Just walk in, plug in your device, and start sharing bold, vibrant content in seconds. No adapters, no hassle.

High Haze Panel

Ensure a clear and visible image in high ambient light areas with a high haze anti-glare panel. The PN-E series panels are designed to scatter incidental light that would otherwise take away from messaging shown on the display. This allows your message to be clear and visible in areas where ambient light would usually take away from what really matters most - your content.

Normal Panel



High Haze Panel



Screen images are simulated.

Key Lock & IR Lock Settings

In high traffic settings, your message will reach a wide audience. If you select Key Lock or IR Lock settings via the remote control, operational controls can be disabled on the PN-E Series itself. This prevents unauthorized access to device menus or settings in public locations such as stores and restaurants.

Smart Control, Built for Business

The PN-E Series makes it easy to stay in command. With intuitive features and support for both RS-232C and LAN control, you can manage displays remotely with ease. Whether you're running one screen or a full network, control stays in your hands - simple, flexible, and reliable.






Note: Side view shown is of the PN-E759 model. Handles are not included on all models.

Total Control with NaViSet Administrator™

Remotely manage all your PN-E Series - and other Sharp or NEC displays - from a single, centralized dashboard using NaViSet Administrator 2™. Perfect for multi-display setups, this free tool lets you monitor status, automate tasks, generate reports, and make on-demand changes from anywhere. Want even more power? Upgrade to the Server Edition for enhanced features and full remote access across your ecosystem.



Mechanical Dimensions

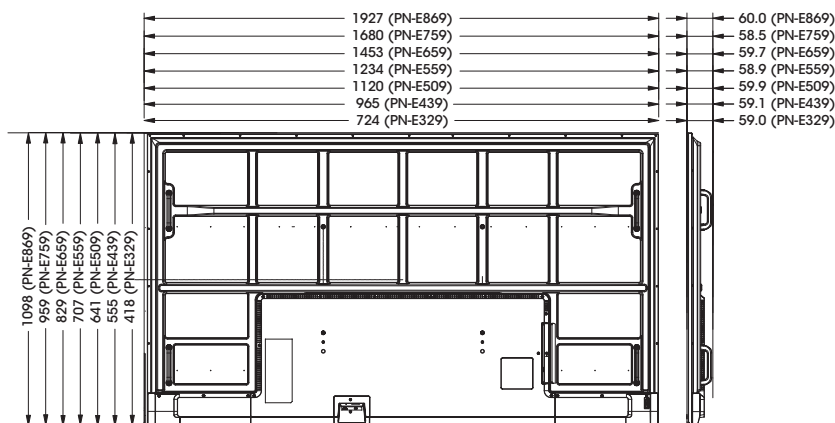

Note: All measurements are specified in millimetres (mm).

Other Key Features

The PN-E series includes features such as:

- Portrait and Landscape orientation allowing for flexibility of installation.
- USB Type-C display input allows for support of the latest technologies using USB-C connectivity.
- High haze 25% LCD panel to reduce glare.
- Integrated Media Player allows for audio, video or image playback via USB.
- Designed for 16/7 use with 24-hour scheduler that allows for programmable on/off times.
- Tilt back and forth installation (-20°~20°) to install at desired angle.
- TileMatrix function allows you to arrange multiple displays of the same screen size together to display one large image.
- Three-year Limited Commercial Warranty.

Tabletop Stand

PN-ST32L (PN-E329)
PN-ST43L (PN-E439/PN-E509)
PN-ST55L (PN-E559/PN-E659)
PN-ST75L (PN-E759/PN-E869)




Wall Mount

WMK-3298T (For PN-E329/E439/E509/E559/E659)
WMK-7598T (For PN-E659/759/869)



Model		PN-E329		PN-E439		PN-E509		PN-E559		PN-E659		PN-E759		PN-E869		
LCD Module	Panel Technology		ADS				VA		ADS							
	Viewable Image Size		31.5"		42.5"		49.5"		54.6"		64.5"		74.5"		85.6"	
	Native Resolution		1920 x 1080		3840 x 2160											
	Brightness (Typical)		350 cd/m²													
	Contrast Ratio (Typical)		1200:1				4000:1		1200:1							
	Viewing Angle		178° Vert., 178° Hor. (89U/89D/89L/89R) @ CR>10													
	Aspect Ratio		16:9													
	Colour Gamut		72%				70%		72%				70%			
	Displayable Colours		16.7 million		1.07 billion											
	Orientation		Landscape and Portrait (CCW Rotation)													
	Panel Haze (%)		25 (Anti-Reflective)													
Connectivity	Input Terminals	Digital	HDMI 2.0 x1, USB-C x1 (DP-Alt Mode Supported)													
		Analog	N/A													
		Audio	N/A													
		External Control	LAN (100Mbit), IR Remote, RS-232C IN (9pin D-sub)													
		Data	USB-A x1 (5V/500mA), USB-C x1 (5V/3000mA)													
	Output Terminals	Digital	N/A													
		Analog	N/A													
		Audio	3.5mm Mini Jack													
		External Control	N/A													
Power Consumption	On (Typ/All Max)		43W/70W		85W/120W		99W/135W		100W/140W		125W/170W		170W/220W		245W/320W	
	Network Standby		2W													
	Normal Standby		<0.5W													
	Current Rating		0.8A - 0.4A @ 100V - 240V		1.4A - 0.6A @ 100V - 240V		1.6A - 0.6A @ 100V - 240V				1.9A - 0.8A @ 100V - 240V		2.5A - 1.0A @ 100V - 240V		3.6A - 1.4A @ 100V - 240V	
	Speaker Rating		Integrated 5W x 5W		Integrated 10W x 10W											
Physical Specifications	Bezel Width (L/R,T/B)		10.5mm/10.5mm/10.5mm/10.5mm		10.7mm/10.7mm/10.7mm/10.7mm		10.8mm/10.8mm/10.8mm/10.8mm				12.9mm/12.9mm/12.9mm/12.9mm					
	Net Dimensions (Without stand; WxHxD)		28.5 x 16.46 x 2.32 in. 724 x 418 x 59.0mm		37.99 x 21.85 x 2.33 in. 965 x 555 x 59.1mm		44.09 x 25.24 x 2.36 in. 1120 x 641 x 59.9mm		49.58 x 27.83 x 2.32 in. 1234 x 707 x 58.9mm		57.20 x 32.64 x 2.35 in. 1453 x 829 x 59.7mm		66.14 x 37.76 x 2.30 in. 1680 x 959 x 58.5mm		75.87 x 43.26 x 2.36 in. 1927 x 1098.6 x 60.0mm	
	Net Weight		4.7kg / 10.36 lbs.		7.5kg / 16.53 lbs.		9.2kg / 20.28 lbs.		12kg / 26.46 lbs.		16.5kg / 36.38 lbs.		24kg / 52.91 lbs.		32.5kg / 71.65 lbs.	
	VESA Hole Configuration		4x M6 x 14mm (200 x 200)				4x M6 x 14mm (400 x 200)		4x M6 x 14mm (400 x 400)		4x M8 x 14mm (600 x 400)					
Environmental Conditions	Operating Temperature		0° - 40° C / 32 - 104° F													
	Operating Humidity		20-80%													
	Operating Altitude		5000m (16404ft)													
Limited Warranty		Three-year Limited Commercial Warranty														
Additional Features		CEC Support through all HDMI Connections, ARC through HDMI1, NaViSet Administrator 2 Compatible, Powered USB Ports (USB-A x1 (5V/500mA), USB-C x1 (5V/3000mA)), Full Scheduler,TileMatrix (1x3, 2x2, 3x1), Energy Star 8.0														
Ships With		3m AC Power Cord, Cord Clamp, USB Cover, IR Remote Control, AAA Batteries														
Optional Speakers		N/A														
Optional Stand		PN-ST32L		PN-ST43L				PN-ST55L				PN-ST75L				

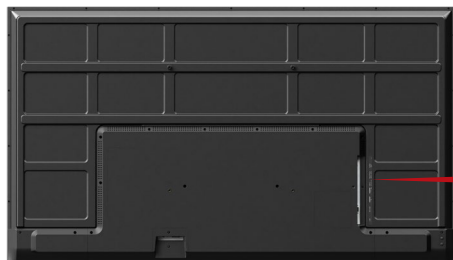

Input Panels

- 1 LAN Port (RJ-45)
- 2 RS-232C Input Terminal (D-sub)
- 3 HDMI Input Terminals (HDMI2)
- 4 HDMI Input Terminals (HDMI1 (ARC))
- 5 USB Type-C Port (power supply 5 V / 3 A)
- 6 USB Type-A Port
- 7 Digital Audio Output Terminal



Visit www.sharp.ca for details.

SHARP®

SHARP ELECTRONICS OF CANADA LTD.
5995 Avebury Road, Suite 900
Mississauga, Ontario L5R 3P9
1-800-567-4277 • www.sharp.ca

Printed in Canada.
VSG-VS-PNE-E-PDF-11/2025

Sharp, NaViSet and TileMatrix and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. All other brand names and product names may be trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without prior notice. Screen images are simulated.